


HI-FLEX

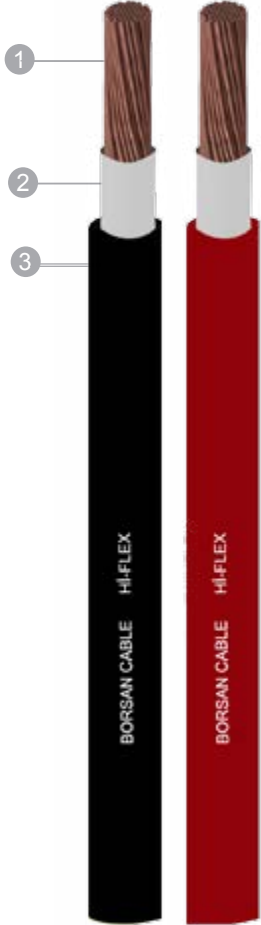

- 1) İnce Telli Bükülgen Bakır
Fine Wired Flexible Copper
- 2) Özel PVC İzole
Special PVC Insulation
- 3) Kılıf Özel PVC
Special PVC Sheath

TEKNİK BİLGİLER

İzin verilen işletme sıcaklığı	: +80 °C
Test gerilimi (AC)	: 2 / 2.5 kV
Minimum Bükme Yarı Çapı	: 12xD
Anma gerilimi	: 450/750V

KULLANIM ALANLARI

Zorlu çalışma alanları için tasarlanan düşük voltajlı uygulamalar ve marin uygulamaları için ekstra esnek PVC - RUBBER akü pil kablosu. Kaynak kablosu olarak da kullanılabilir.

TECHNICAL DATA

Permissible operating temperature	: +80 °C
Test Voltage (AC)	: 2 / 2.5 kV
Minimum Bending Radius	: 12xD
Rated Voltage	: 450/750V

USAGE AREAS

Extra flexible PVC/ RUBBER alloy battery cable designed for tough working environments and suitable for low voltage auto and marine applications. Can also be used as welding cable.

TEKNİK ÖZELLİKLER / TECHNICAL DATA

Nominal Kesit Rated Cross-section	Bakır İletken Copper Conductor	Ortalama Dış Çap Approx. Overall diameter	Yaklaşık Net Ağırlık Approx. Net Weight
mm ²	ad. x mm	mm	kg/km
10	class 6	8.00	137
16	class 6	9.05	195
25	class 6	10.20	277
35	class 6	11.35	371
50	class 6	13.05	518
70	class 6	15.10	722
95	class 6	17.55	968
120	class 6	19.15	1209
150	class 6	20.60	1502
185	class 6	24.30	1847
240	class 6	29.05	2417
300	class 6	32.00	2980